


Note-1: Sensing pipe must be made of Stainless Steel/ Corrosion resistant only. Minimum 1/2" Bore and connected to a static point at the bottom of the reservoir

Valve	11/2-2"	3"	4"	6"	8"	10"	12"	NOTE: PROVIDE AMPLE CLEARANCE FOR FUTURE MAINTENANCE						
Size	11/2-2			<u> </u>	<u> </u>		12	CATALOG No.	FP-04-4	50-82-A5				
DN	40-50	80	100	150	200	250	300		Project Name: BERMAD Doc. Code: GA		Material:	Finish:		
Metric	mm	mm	mm	mm	mm	mm	mm	₫-₽			DESCRIPTION:		5	
Th	348	373	391	444	488	488	531				Level Control Valv			
Tb	78	100	115	140	172	172	242		NAME	DATE	1			
L1	205	257	320	415	500	605	725	DESIGN	Carel Van Gent	11.04.2013	1			BERMAD
Ts	78	100	112	153	183	203	305	DRAWN	Carel Van Gent	11.04.2013	File name: FP-04-450-82-A5 SCAL		scale: 1:4	A3
Tw	331	353	372	437	464	464	500	APPROVED	Doron Eshel	25.09.2019	DWG No. 006597	WEIGHT [Kg]:	SHEET 1 OF 1	REV. –

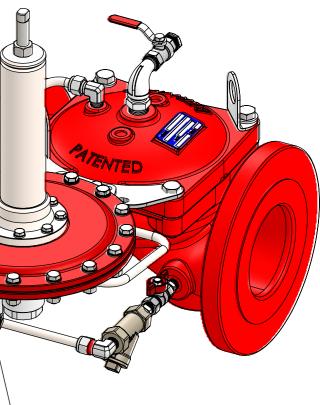

–1/2"NPT(F) Level Sensing Pipe (Note-1)

ltem	Description				
1	Bermad 400 Series Valve	1			
2	Priming Y-Strainer	1			
3	Ball Valve	1			
4	Altitude Pilot Valve #82-M6 (2-14m.)	1			
5	Ball Valve	1			
6	3-Way Ball Valve	1			
F	Tube and Pipe Fittings	Lot			
Т	Seamless Tube 3/8"-1/2"OD	Lot			